
iopak ahead of the pack

Brand new machine at excellent price!

- Infeed and outfeed rollers. Normally an optional extra for carton tapers.
- Mounted on lockable castors. Mobility when you need it, stability when you don't.
- Box height indicator. Clearly marked in centimetre/half-cm divisions. Makes adjustment a breeze.
- Driven by 2 powerful 120W motors mounted beneath the conveyor. Better grip and torque for heavier boxes.
- Carton guides. Position the box for precise tape application.
- Tapes both the top and bottom of the box
- Includes tool set.



SIDE DRIVE CARTON TAPER S/S: SD5050

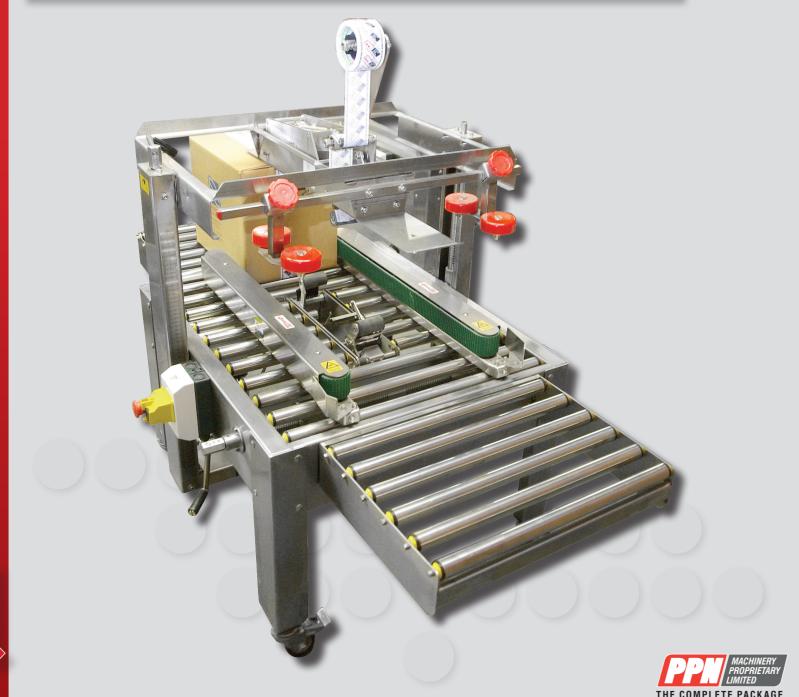

S/S SIDE DRIVE CARTON 5050 S/S TAPER

STOCK ITEM: 17721

Specifications

- Stainless steel rollers
- Non-corrosive plastic bearings
- Sturdy Stainless Steel Body construction.
- 2 x 240 V 50Hz 1400 RPM 120 W electric motors via 17:1, 60 Nm Reducer to achieve a belt speed of 16.3 m/min.
- Power240V/50Hz 120W
- Sealing CapacityUp to 20 Cartons/minute (Standard Box)
- Minimum Sealing Size 100mm W x 120mm H
- Maximum Sealing Size 500mm W x 500mm H
- Adhesive Band Used BOPP Brown Paper, PV Adhesive Band
- Width of Adhesive Band- Up to 60mm
- Height of Working Table- 550mm-760mm
 Adjustable
- Dimensions (including infeed/outfeed rollers) 1660mm L x 740mm W x 1300mm H
- Net Weight 120kg



•••

