## iopak ahead of the pack

IOPAK has introduced a brand new fully stainless steel constructed jacketed cooker/kettle which can be used for cooking and cooling. The unit is fitted with a contra-rotating scrape surface mixing arm.

This kettle features 2 x half moon hinged lids for food hygiene. The interior of the tank has a dome base and is fitted with a 3" product outlet including an air actuated discharge valve. A swept surface (Teflon tipped) stirrer is top and bottom bearing supported and direct driven by a 3kW, 29rpm, 415V AC, 3 Phase gear motor.

Teflon scrapers can be easily changed by removing a simple hook arrangement. An additional contra - rotating centrally mounted agitator is fitted with a 1.1kW, 49 rpm motor.


A digital (- 20 to 150 deg C) temperature indicator indicates the temperature of the tank contents.

- Design Pressure (WP): 300 KPa
- Test Pressure (HTP) : 450 KPa
- Design Temperature (DT):135 deg C (max 150 deg C)



## 1000L JACKETED COOKER KETTLE (CONTRA ROTATING) 316: 1000 CRM



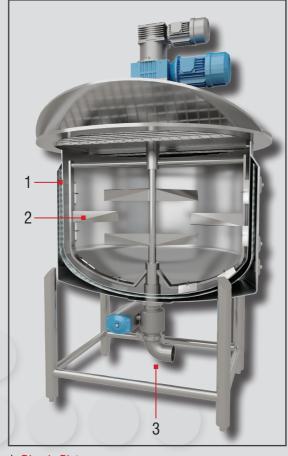

THE COMPLETE PACKAGE

- 1. Dimple Plate
- 2. Teflon-Tipped Stirrer
- 3. Ball Valve Outlet

## 1000L JACKETED COOKER KETTLE (CONTRA ROTATING) 316: 1000 CRM STOCK ITEM: 8317

## Specifications

- Code: AS1210 Class 3
- VWA: V0420425
- Internal Diameter 1300 mm
- Internal Depth 1000mm
- Outer Diameter 1450mm
- Lid height above floor 1650mm
- Outlet Height above floor 560mm
- Overall Height 2415mm
- Jacket inlet & outlet ports 25mm diameter
- Material of Construction 316 s/s (inner) 304 s/s (outer).
- Wall Thickness: 4mm inside wall, 2.0mm jacketed wall
- \* Recommended Oil: TORA 220 or equivalent (if the gearbox is 7 years old or more, TORA 320 or equivalent)

