

## iopak ahead of the pack

IOPAK has introduced a brand new fully stainless steel constructed jacketed cooker/kettle which can be used for cooking or cooling.


This kettle features 2 x half moon hinged lids for food hygiene.

The interior of the tank has a dome base and is fitted with a 3" product outlet including an air actuated discharge valve.

A swept surface (Teflon tipped) stirrer is top and bottom bearing supported and directly driven by a 2.2kW, 29rpm, 415V AC, 3 Phase gear motor.

Teflon scrapers can be easily changed by removing a simple hook arrangement. A digital (- 20 to 150 deg C ) temperature indicator indicates the temperature of the tank contents.

## 500L JACKETED COOKER KETTLE (SCRAPE SIDED) 316: 500 SM

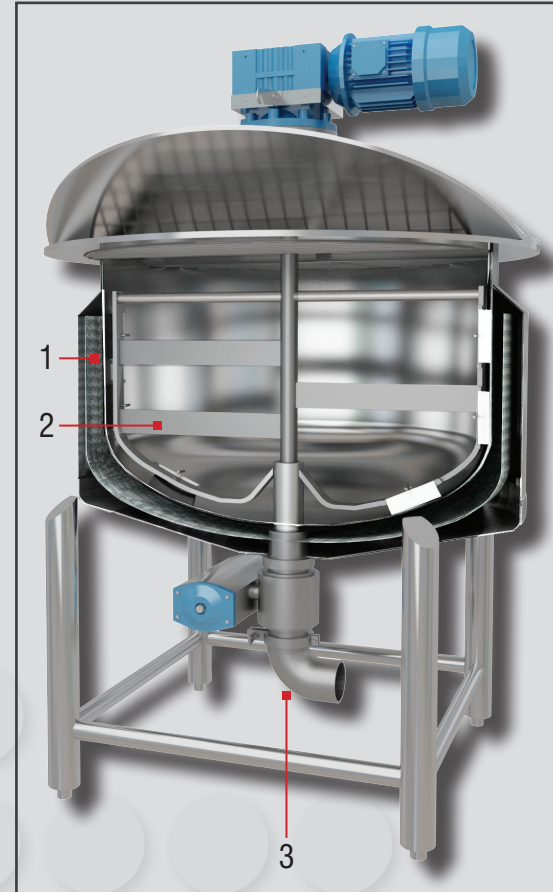

1. Dimple Plate
2. Teflon-Tipped Stirrer
3. Ball Valve Outlet

**PPN** MACHINERY  
PROPRIETARY  
LIMITED  
THE COMPLETE PACKAGE



## 500L JACKETED COOKER KETTLE (SCRAPE SIDED) 316: 500 SM

STOCK ITEM: 8913G

### Specifications

- Design Pressure (WP) : 300 KPa
- Test Pressure (HTP) : 450 KPa
- Design Temperature ( DT) :135 deg C (max 150 deg C)
- Code: AS1210 Class 3
- VWA: V0420425
- Internal Diameter - 1100 mm
- Internal Depth - 750mm
- Outer Diameter - 1250mm
- Lid height above floor - 1400mm
- Outlet Height above floor - 560mm
- Overall Height - 2100mm
- Jacket inlet & outlet ports 25mm diameter
- Material of Construction - 316 s/s (inner) 304 s/s (outer)
- Wall Thickness: 4mm inside wall, 2.0mm jacketed wall
- Recommended Oil: TORA 220 or equivalent (if the gearbox is 7 years old or more, TORA 320 or equivalent)

NEW &  
INNOVATIVE  
PRODUCTS  
**iopak**  
ahead of the pack

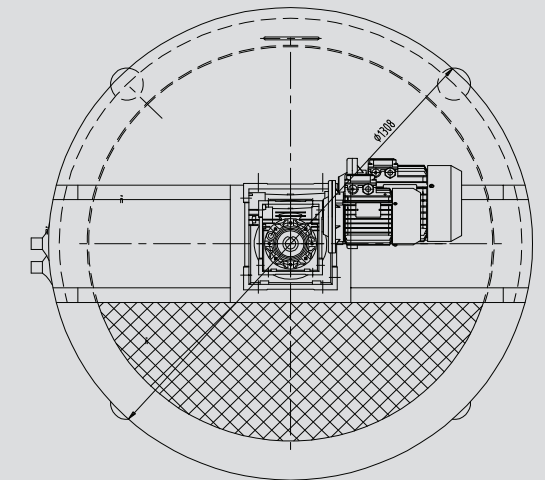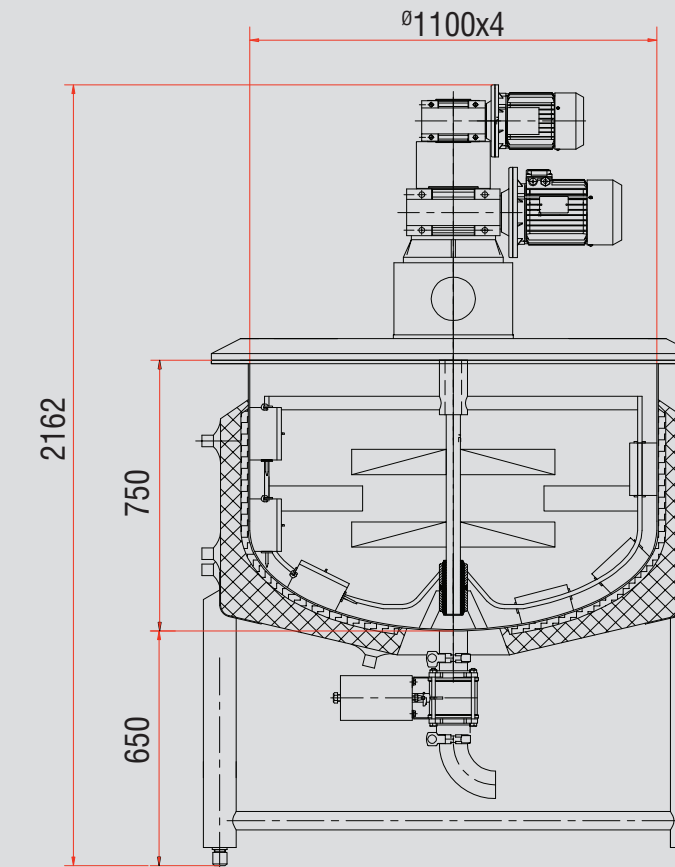

**PPN** MACHINERY  
PROPRIETARY  
LIMITED  
THE COMPLETE PACKAGE

PROCESSING & PACKAGING EQUIPMENT CUSTOM DESIGN SERVICES  
For more information on this machines call sales: +61 3 9791 7011 or any others visit: [www.iopak.com](http://www.iopak.com)