


## iopak ahead of the pack

This brand new IOPAK 2" (51mm) self priming positive displacement pump is made AISI316. Self-priming pumps create and maintain a sufficient vacuum level to draw fluid with no external assistance.

As a positive displacement pump, it is able to handle product mixed with air as well as product with a liquid level below the pump. This pump is useful in the milking room as it can suction milk straight from the holding tank.

It can also be used in an automatic CIP cleaning system as the return flow pump for the cleaning tank.

## 2" (51MM) SANITARY SELF-PRIMING PUMP (CIP) MODEL ZXB-SY20-4

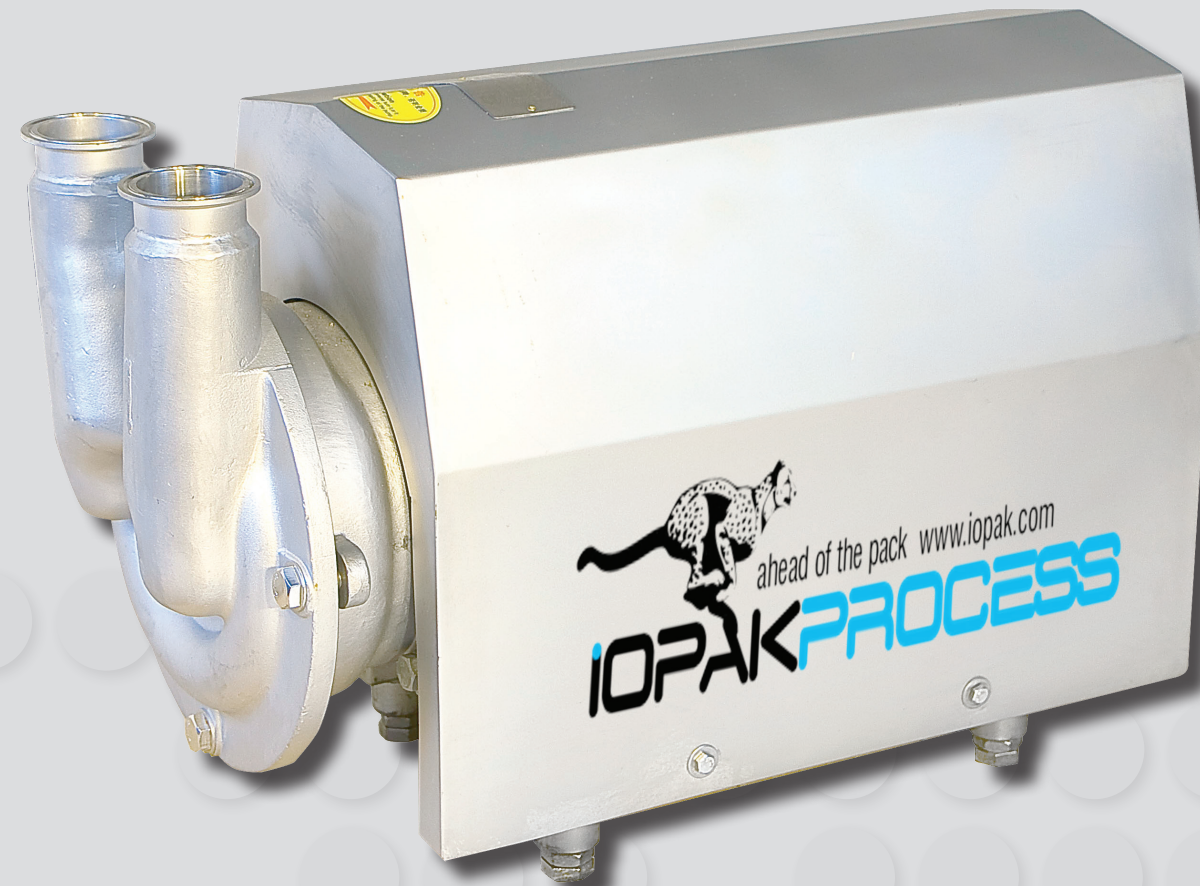


## 2" (51MM) SANITARY SELF-PRIMING PUMP (CIP) MODEL ZXB-SY20-4

STOCK ITEM: 13059G

### Specifications

- Type- CIP Self Priming, positive displacement
- Flow Q - 10 - 20 cubic metres/ hour
- Total Lift H -18 -20m
- Suction Lift - 5-6m
- Impeller wheel spoke diameter - 189mm
- Internal/outlet pipe diameter - 51mm (2")
- Power- 4Kw (415V) 50Hz
- Rotational Speed = 1420rpm
- Footprint - 600mm L x 350mm W x 420mm H
- Weight: 55kg

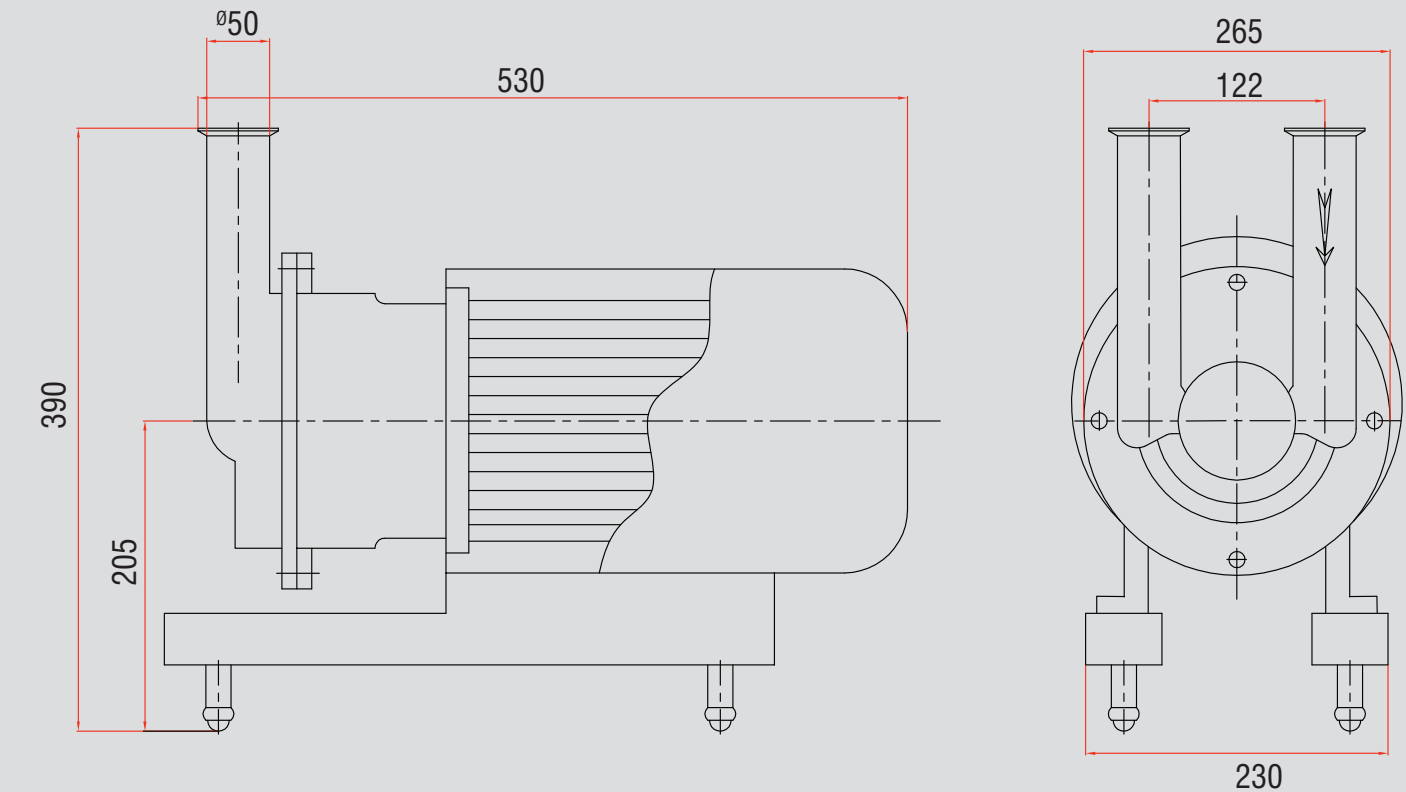

NEW &  
INNOVATIVE  
PRODUCTS



NEW &  
INNOVATIVE  
PRODUCTS

